


BioFace-T80

8" Outdoor Touch Screen Face Recognition
Access Control Terminal

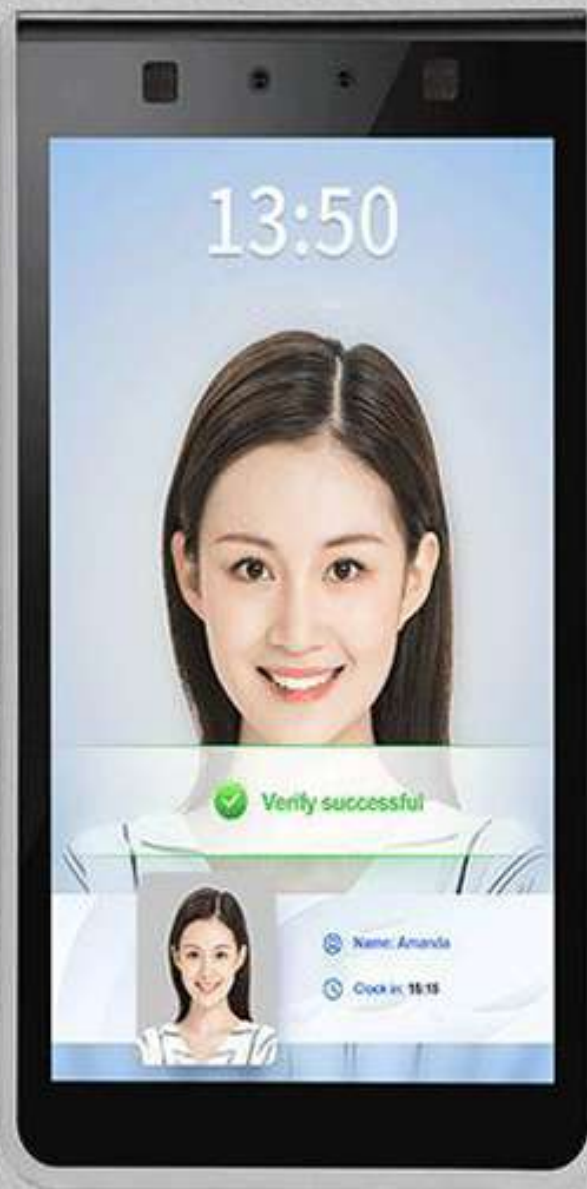

Description

Facial recognition machine support BLACK COPPER Bi-Scan face recognition technology, which makes the recognition process more accurate with 0.3s recognition time, even when work with a large faces database. The Bi-Scan algorithm allows you to determine whether is a person wearing a mask or not and prevent the possibility of walking through the photo. The device built-in white LED illumination is provided for observation in complete darkness.

Accurate Recognition Fast Passage

Adopt the industry-leading visible and infrared binocular camera with backlight resistance to achieve live detection and accurate recognition in various environments; face recognition can be completed within 0.3 seconds with an accuracy rate higher than 99%.

Main Features:

- Support real time liveness detection
- Support tracking of personnel movements under strong backlight conditions
- Unique live face recognition algorithm to accurately recognize faces, face recognition time is less than 0.3s
- Using Linux operating system, better system stability
- The camera uses H.265 Main Profile encoding, compatible with NVR and other storage devices through the ONVIF protocol
- Mean time between failures MTBF>50000 H
- Support 24,000 face matching library and 160,000 face recognition records
- Rich interface protocol, support TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, DNS, DDNS, DHCP, SMTP, UPNP, MQTT protocol, Windows/Linux
- From -20 °C to + 55 °C environment for long-term stable operation
- Support tamper alarm
- Support microphone input audio, speaker output audio
- Rich hardware interface (I/O, WG26, WG34, RJ45, Door sensor, Doorbell, Open door, Alarm, RS485)
- 8-inch touch screen, no streaking and delay
- Support automatic gain control and automatic white balance
- 3D noise reduction and fog-passing technology makes the monitoring picture under low illumination more clear and delicate
- Support code stream and I frame interval setting
- Support video area partial blocking
- Support ROI coding
- Support setting maximum exposure time
- Support 2D noise reduction, 3D noise reduction
- Support recording schedule time period and upload mode setting
- Support video brightness, contrast, hue, saturation, gamma adjustment
- Support setting the maximum auto exposure time
- Support face intelligent exposure, face smart enhancement settings

Hardware		
Processor	Dual Core ARM Cortex-A7 and RISC-V MCU	
Operating system	Linux Operating system	
Memory	1G+8G	1G+16G
Camera	Dual camera, 2MP, 1920*1080	
Sensor	1/2.8" Progressive Scan CMOS	
Lens	4.5mm	
WiFi module	2.4GHz frequency band, IEEE802 b/g/n protocol; 5GHz frequency band, IEEE802 a/n/ac protocol	
Bluetooth module	GFSK, DQPSK, 8DPSK, LE (1Mbps), 2LE (2Mbps) technical specifications	
Card swiping module (optional)	13. 56MHz, support Mifare S50, S70 card, ultralight card, NTAG card, DESFire D21, D41, D81, non-contact CPU card	
4G module (optional)	Support LTE-FDD, LTE-TDD, DC-HSPA+, WCDMA, EDGE, GPRS and other network standards, the maximum downlink rate is 160Mbps, and the maximum uplink rate is 60Mbps	
QR code Scanning module (optional)	640 (horizontal) X 480 (vertical) CMOS, horizontal viewing angle 31° , support QR code, PDF417, EAN13, EAN8, UPC-A and other one-dimensional codes, two-dimensional codes	
Touch screen module	Multi-touch capacitive touch screen	
Speaker	voice playback content can be customized	
Performance		
Recognition height	1.2~2.3 meters, angle adjustable	
Recognition distance	0.5~2.5 meters	
Recognition angle	Vertical viewing angle: 30°; Horizontal viewing angle: 30°	
Recognition time	Less than 0.3 seconds	
Storage capacity	80,000 capture records	
Face capacity	30,000pcs	
Interface		
Power out	DC12V/2A	

Network interface	1 RJ45 10M / 100M adaptive Ethernet port, Gigabit Ethernet port can be customized	
Wiegand interface	1ch Wiegand interface input/output	
Alarm interface	1ch alarm interface	
Door sensor interface	1ch magnetic interface	
Open interface	1ch open door interface	
Doorbell interface	1ch doorbell interface	
Lock interface	1ch lock interface	
Communication interface	1ch RS485 interface	
Camera		
Camera	Dual cameras, G+P lens, visible light and near infrared, support liveness detection	
Effective pixels	2MP, 1920*1080	
Min Illumination	Color 0.01Lux @F1.2(ICR);B/W 0.001Lux @F1.2 (ICR)	
SNR	≥50db(AGC OFF)	
WDR	120db, ISP algorithm face partial exposure	
Video encoding	H.265 Main Profile encoding/H.264 BP/MP/HP encoding/MJPEG encoding	
Image	Main Stream	50Hz: 25fps (1920×1080,1280×720)
		60Hz: 30fps (1920×1080,1280×720)
	Sub Stream	704*576, 25 frames/second, 640*480, 25 frames/second, 352*288, 25 frames/second
Regular		
Operating temperature	-30°C +60°C	
Working humidity	0~90% relative humidity, no condensation	
Salt spray	level Rp6 or above	
Antistatic	contact ±6KV, air ±8KV	
Power	DC12V/2A	
Waterproof	IP66	
Power	20W(MAX)	
Screen size	8 inches IPS HD screen, Resolution: 1280*800	
Equipment size	242 (L) * 133 (W) * 22 (T) mm	