

DS-3E0518P-E/M 16-Port Gigabit Unmanaged PoE Switch

DS-3E0518P-E/M switch is a layer 2 PoE network switch, providing 16 × Gigabit PoE ports and 2 × Gigabit SFP fiber optical ports. On top of high-performance access, the switch provides advanced PoE power technology to guarantee the stable network upload of the adaptive data.



Feature and Function

- 16 × Gigabit PoE ports, 2 × Gigabit SFP fiber optical ports.
- IEEE 802.3at/af standard.
- IEEE 802.3, IEEE 802.3u, and IEEE 802.3x standard.
- 6 KV surge protection for PoE ports.
- PoE power management.
- Gigabit network access.
- Wire-speed forwarding
- Store-and-forward switching.
- Solid high-strength metal shell.




Specification

| Model | | DS-3E0518P-E/M |
|--------------------|---------------------------|---|
| Network parameters | Port number | 16 × Gigabit PoE ports, 2 × Gigabit SFP fiber optical ports |
| | Port type | RJ45 port, full duplex, MDI/MDI-X adaptive |
| | Standard | IEEE 802.3, IEEE 802.3u, IEEE 802.3x |
| | Forwarding mode | Store-and-forward switching |
| | MAC address table | 8 K |
| | Switching capacity | 36 Gbps |
| | Packet forwarding rate | 26.784 Mpps |
| | Internal cache | 4.1 Mbits |
| PoE power supply | PoE standard | IEEE 802.3af, IEEE 802.3at |
| | PoE power pin | Ethernet cable 1/2/3/6 provide power supply. |
| | PoE port | Ports 1 to 16 |
| | Max. port power | 30 W |
| | PoE power budget | 125 W |
| | Max. power consumption | 150 W |
| General | Shell | Metal material, no fan equipped. |
| | Net weight | 2.500 kg (5.51 lb) |
| | Gross weight | 3.570 kg (7.87 lb) |
| | Dimension (L × H × D) | 440 mm × 44 mm × 220.8 mm (17.3" × 1.7" × 8.7") |
| | Operating temperature | -10 °C to 55 °C (14 °F to 131 °F) |
| | Storage temperature | -40 °C to 85 °C (-40 °F to 185 °F) |
| | Operating humidity | 5% to 95% (no condensation) |
| | Storage humidity | 5% to 95% (no condensation) |
| | Power supply | 100 to 240 VAC, 50/60 Hz, 2.5 A (Max) |
| | Power consumption in idle | 25 W |

Physical Interface

Front panel:

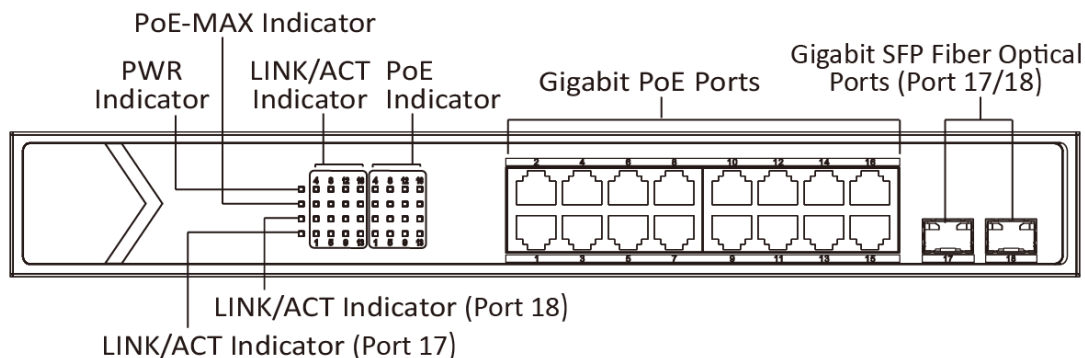

Back panel:



Available Model

DS-3E0518P-E/M


Optional Accessory

| SFP Module | Fiber type | Connector | Date Rate | Wavelength | Distance |
|-------------------------|---------------------------|-----------|-----------|-------------------|------------|
| HK-SFP-1.25G-20-1310 | Single fiber, Single-mode | LC | 1250 Mbps | Tx1310nm/Rx1550nm | 0 to 20 km |
| HK-SFP-1.25G-20-1550 | Single fiber, Single-mode | LC | 1250 Mbps | Tx1550nm/Rx1310nm | 0 to 20 km |
| HK-SFP-1.25G-1310-DF-MM | Duplex fiber, Multi-mode | LC | 1250 Mbps | Tx1310nm/Rx1310nm | 0 to 1 km |
| HK-SFP-1.25G-20-1310-DF | Duplex fiber, Single-mode | LC | 1250 Mbps | Tx1310nm/Rx1310nm | 0 to 20 km |


NOTE

HK-SFP-1.25G-20-1310 has to work with HK-SFP-1.25G-20-1550 as a pair.

Dimension (unit: mm)

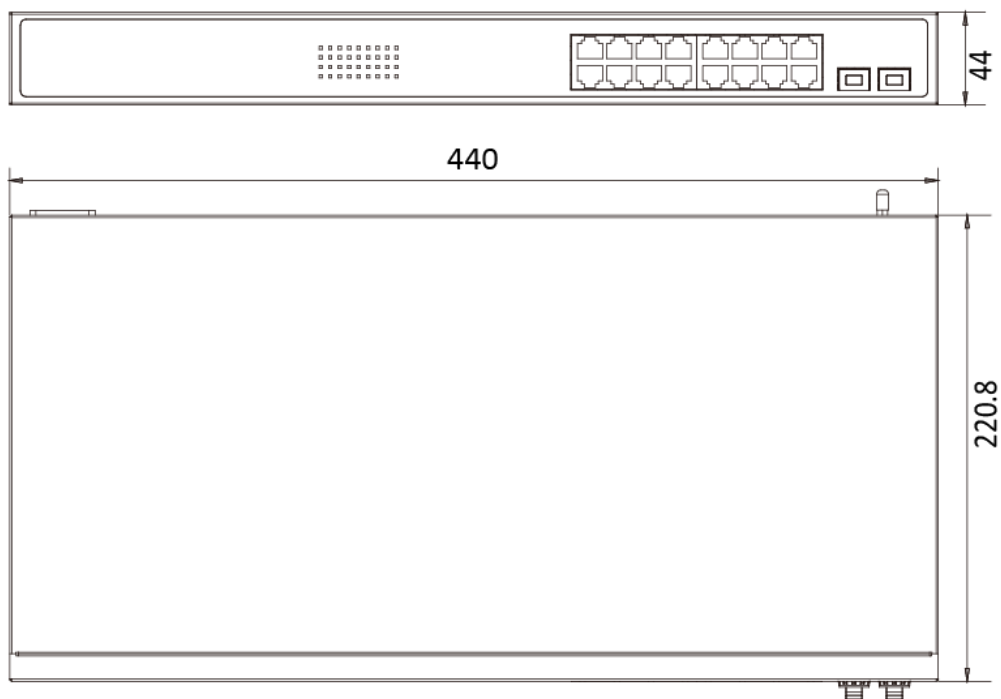

Typical Application

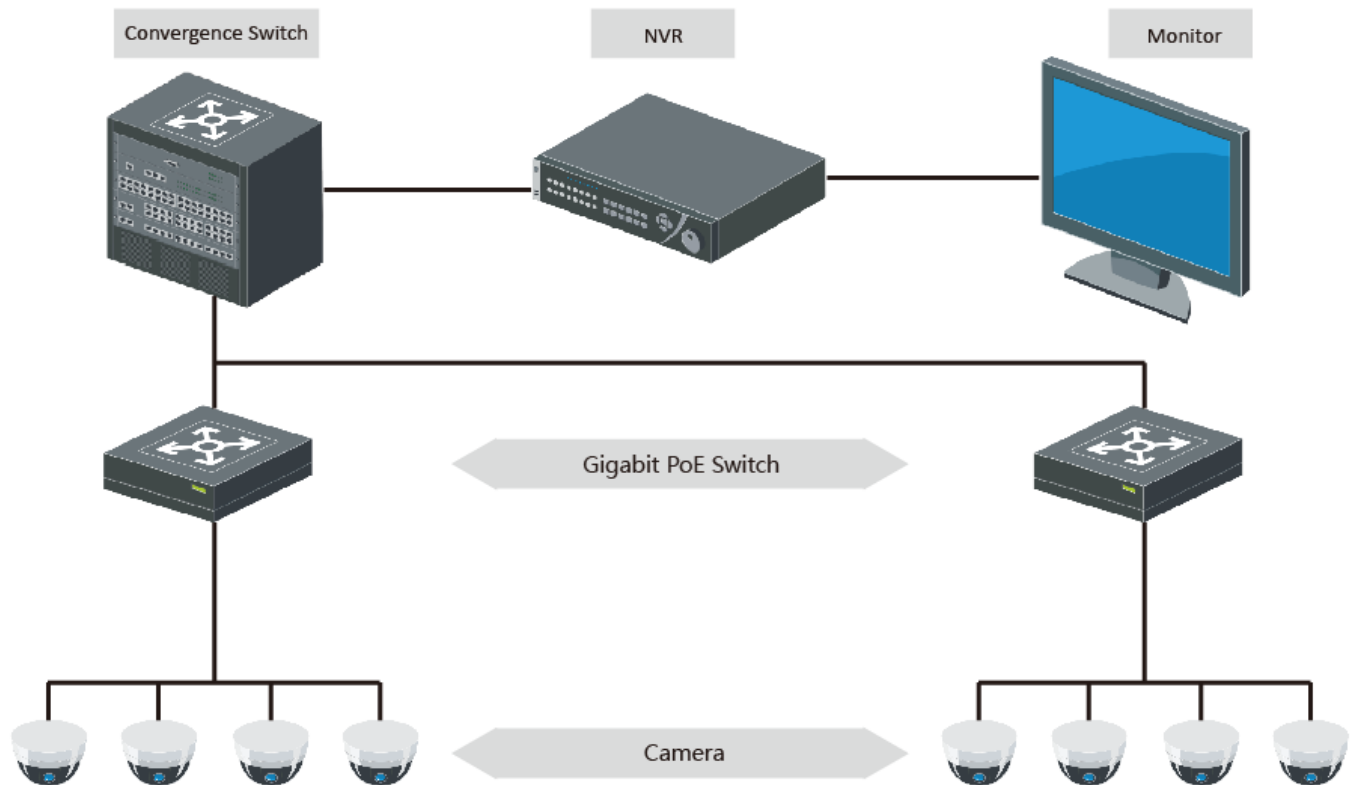

Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
sateru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com